

REV24/M BOOST

Automation for collective and industrial sliding gates
up to 1400 kg



For **collective** and
industrial usage



Available in **24V**



REV24/M BOOST

Faster, safer. This is our REV BOOST operator!




Fast operator

 26m/min

 1200kg

NET24N BOOST board for easy speed and deceleration management








Magnetic limit switches







COD.	Art.								OTHER CHARACTERISTICS	
616025	REV24/M BOOST	NET24N BOOST	24V	1200			M	17,1	30	<ul style="list-style-type: none"> • Self-locking • Magnetic limit switches • Speed adjustment until 26m/min and slow down in opening and closing

TECHNICAL INFO	REV24/M BOOST
Power supply (V)	230V - 240V ~ (50/60 Hz)
Motor power supply (V)	24V ~
Maximum power absorption (W)	800
Max thrust (N)	861
Leaf max weight (kg)	1200Kg
Duty cycle (cycles/hours) for an 8m leaf length	22 for gates up to 1200Kg
Built-in capacitor (µF)	\
Operating temperature (°C)	-20 ÷ 50
Motor thermal protection (°C)	\
Speed (m/min)	26
Standard pinion	Z=18
Weight with packing (Kg)	18
Sound pressure (dBA)	< 70
Protection level	IP44 (IPX0 for /IB versions)

Example of a typical installation

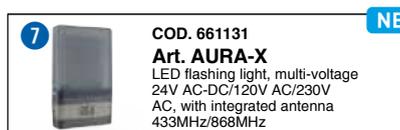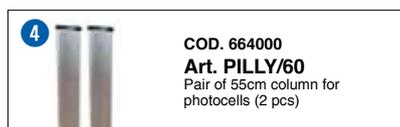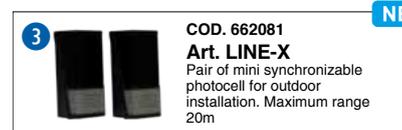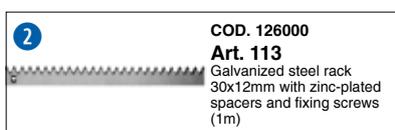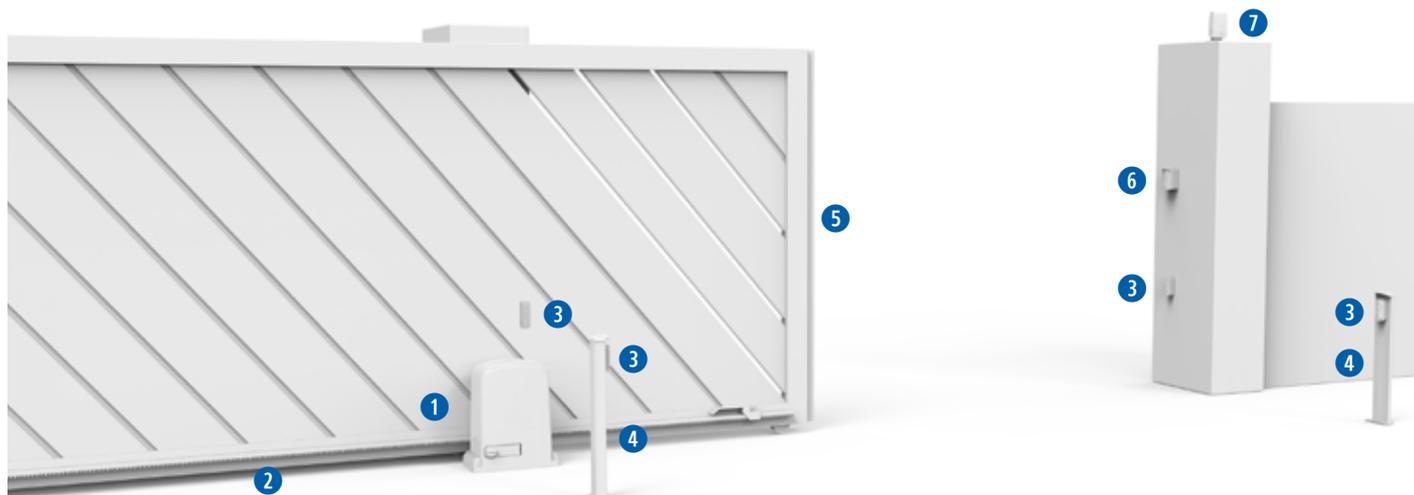

SPECIFIC ACCESSORIES

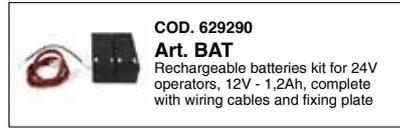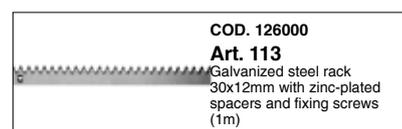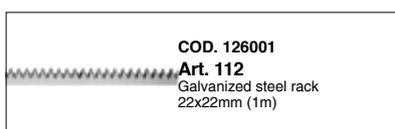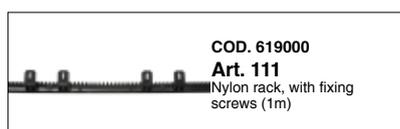

NEW

NEW

NEW

NEW

NEW

DEAuser



DEAuser is the app for **private users** that allows activation of automation at **close proximity** via Bluetooth.

By installing the NET-NODE on all devices with NETLINK technology, users can control their automations through their smart devices.

To be used with:



Art.NET-NODE 2.0
Cod.677642



DEAinstaller



DEAinstaller is the App dedicated to the **professional installer** and allows Installers to program and manage DEA automations on-site in a simple and intuitive way from their smart devices.


If you use it with the NET-NODE you can:

- ✓ keep a **data backup** of all installations
- ✓ easily adjust the **parameters** of control boards
- ✓ update the **firmware**
- ✓ program the **maintenance**
- ✓ manage or customise the **remotes**
- ✓ read **technical manuals** or have a look at the **electrical connections**
- ✓ control the **inputs** and **output** of the control boards
- ✓ **control** the automation with the App


To be used with:



Art.NET-NODE 2.0
Cod.677642

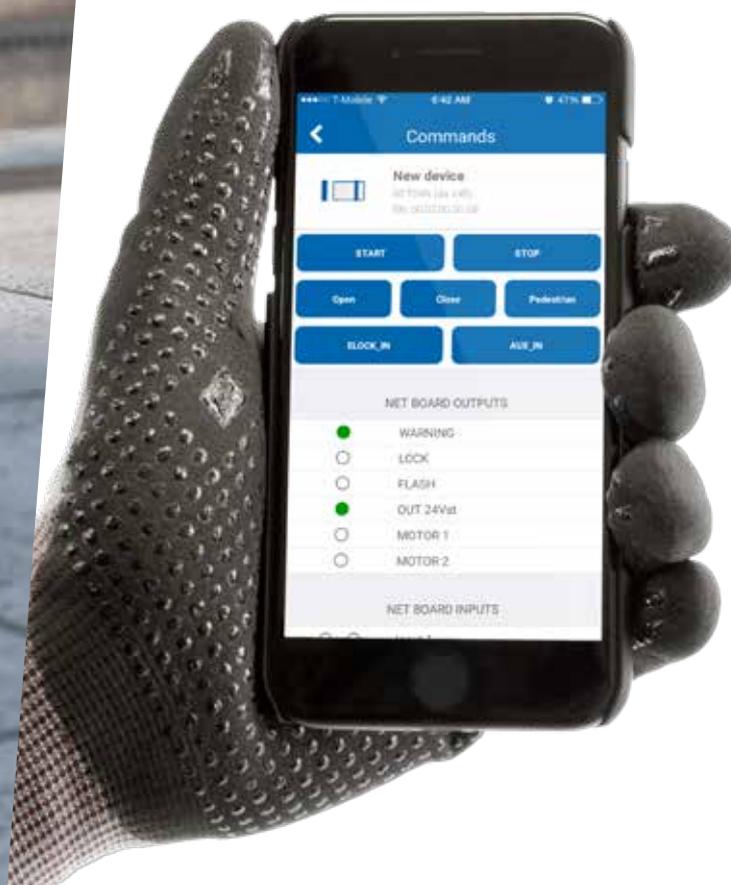

Generic accessories

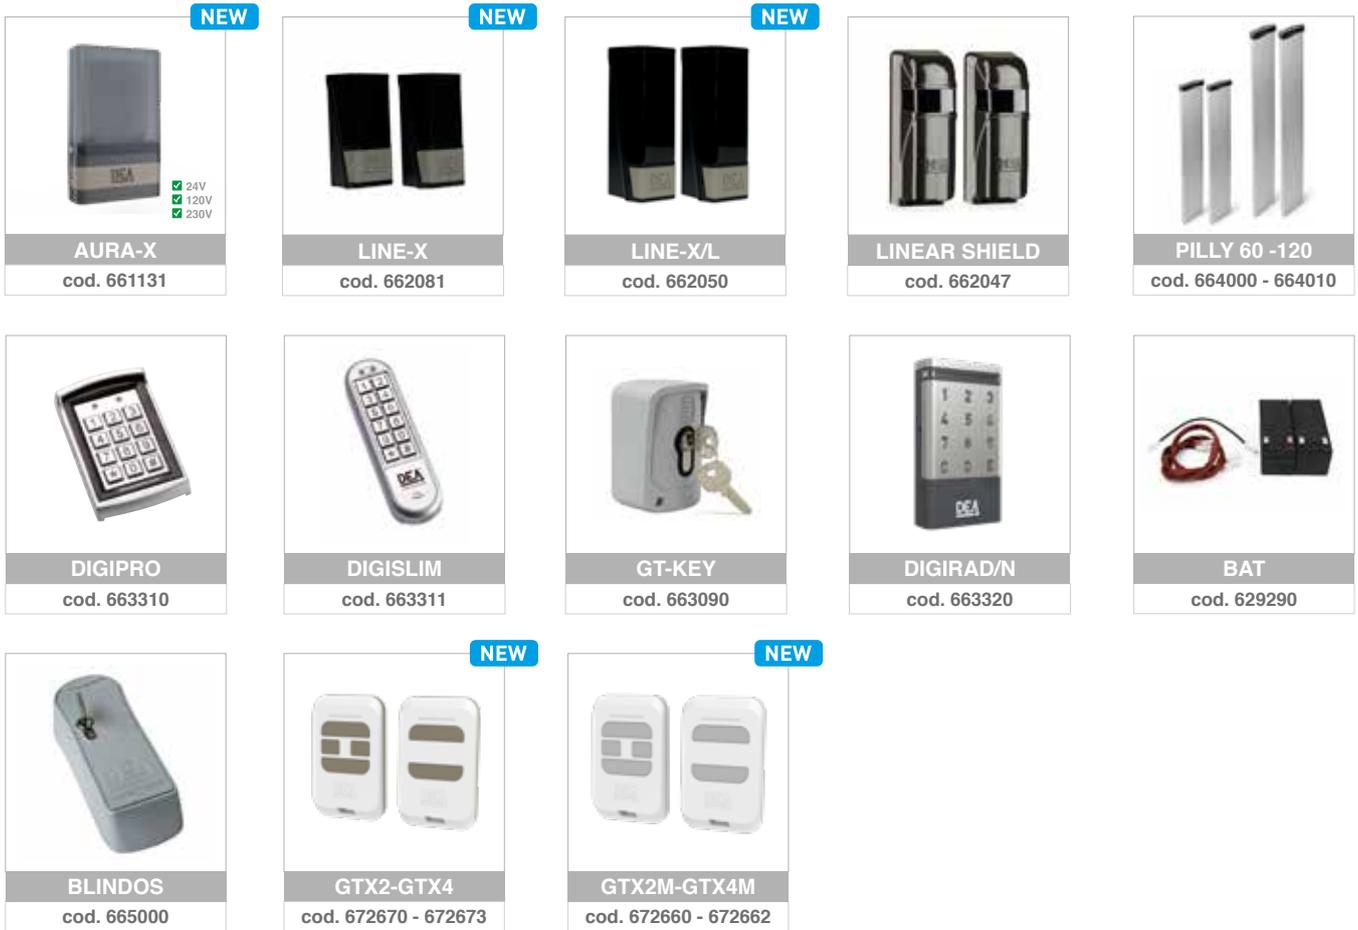

#safeasyoulike!

Non-copyable remotes!

GTX remotes are multi-function. They have three coding possibilities: DIP SWITCH, Rolling Code and D.A.R.T. the new DEA advanced coding.

You can customise the code of the remotes to guarantee the maximum security to your customer.

D. DEA
A. Advanced
R. Rolling Code
T. Transmission

Looking for **total safety**?
 With **NET-BOX** each installer can customise the code of your GTX remotes.



#colourasyoulike!

Choose your favorite colour!

GTX remotes can be customised with button kits in three colours: yellow, green and orange.



Note: button kits are supplied in packs of 5. The remote must be ordered separately.



NETLINK

is our technology applied to DEA devices for the smart management of your installations, both **locally** and **remotely**.



Our range

Automations for sliding gates



LIVI/X




REV




GULLIVER/N



Automations for sectional doors



SPACE/N



ADVANCE/N



LIVI 902



Automations for swing gates




MAC



STING




LOOK




GEKO/X



LIVI 502



GHOST 100/200



OLI/N



Automations for industrial gates



LATO



550 PL



Barriers



PASS/N



STOP/N



TRAFIK/N



Bollards



ROCK



DEA[®]
move as you like

HEADQUARTER
DEA SYSTEM S.p.A. - P. IVA 02946290240
Via della Tecnica, 6 - 36013 Piovene Rocchette (VI) - ITALY
☎ + 39.0445.55.07.89 - codice SDI: SUBM70N
info@deasystem.com - www.deasystem.com

Branches > Italia, France, United Kingdom, Ireland, España,
Portugal, Polska, Deutschland, Беларусь, Australia

> **HEAD OFFICE**
DEA System UK & IRE
Sandholes Road - Cookstown - Co. Tyrone
BT80 9AR - IRELAND
☎ + 44 (0)28 8676 6476 - 📠 + 44 (0)28 8676 2414
info@deasystem.net

DEA System UK & IRE
Unit 29-31 - The IO Centre - Hearle Way - Hatfield - Hertfordshire
AL10 9EW - UNITED KINGDOM
☎ + 44 (0)1707 246 599
contact@deasystem.net